


HDT Spacers are produced from reinforcement steel 5mm in an "A" shape. Thanks to the "A" shape and the thickness of the wire makes it a stable and reliable spacer. In addition, the spacer insures that the reinforcement steel is in the correct position even with higher load of the bars/mesh placed on top of the spacer. At the same time the HDT spacer also minimizes the amount of spacers used, thanks to its stability and strength to support high loads. The HDT spacer is a reliable product which is being used for many years by our partners throughout Europe to help them to safely and correctly complete their building sites. Moreover, its compact packaging and delivery without pallets, it makes it an easy to combine product with other products and which is in the end environmental friendlier.

Quality.
Effectivity
Speed

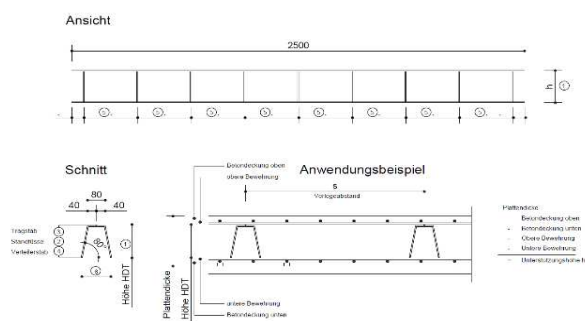

Application

The HDT Spacer is being placed on top the lower layer of the reinforcement steel. The spacer enables to place the upper layer of reinforcement steel on the correct height.

Corrosion protection

The HDT Spacer is not treated against corrosion.

Placement

The distance between the HDT Spacers, 700-1000mm.

Tolerance

± 4mm

Availability

HDT Spacers are being produced on stock, however we do recommend you to check our availability at all times to be sure the amount and type product you need is available.

Sizes and packaging

Length = 2500 mm

Height = 80 - 440mm (every 10mm)

Packaging = 10pc/bundle

Prices

Current prices of the HDT Spacers is upon request.

Type	Weight (kg/pc)	Length (mm)	Packaging (ks/mini-bal)	Packaging (ks/big-bal)
80	1,508	2500	10	200
90	1,542	2500	10	200
100	1,576	2500	10	200
110	1,611	2500	10	200
120	1,645	2500	10	200
130	1,679	2500	10	200
140	1,713	2500	10	200
150	1,748	2500	10	200
160	2,010	2500	10	200
170	2,056	2500	10	200
180	2,103	2500	10	200
190	2,150	2500	10	200
200	2,196	2500	10	200
*210	2,243	2500	10	100
*220	2,290	2500	10	100
*230	2,337	2500	10	100
*240	2,383	2500	10	100
*250	2,430	2500	10	100
*260	2,653	2500	10	100

80-260

Type	Weight (kg/pc)	Length (mm)	Packaging (ks/mini-bal)	Packaging (ks/big-bal)
*270	2,706	2500	10	100
*280	2,759	2500	10	100
*290	2,812	2500	10	100
*300	2,864	2500	10	100
*310	2,917	2500	10	100
*320	2,970	2500	10	100
*330	3,023	2500	10	100
*340	3,076	2500	10	100
*350	3,129	2500	10	100
*360	4,135	2500	10	100
*370	4,213	2500	10	100
*380	4,291	2500	10	100
*390	4,369	2500	10	100
*400	4,447	2500	10	100
*410	4,525	2500	10	100
*420	4,602	2500	10	100
*430	4,680	2500	10	100
*440	4,758	2500	10	100

270-440

* HDT Spacers produced only by ordering min. 500pc.